

# REVO®

THE REVO PROVIDES SLEEK STYLING  
AND SUPER PORTABILITY.

## REVO®

The Revo® delivers full-sized scooter style, performance, and features in a compact, lightweight design that easily disassembles for transport while remaining highly affordable.



BUILT WITH PRIDE

**Pride**  
Mobility Products Ltd.




(Tel) 01869 324 600 • (Fax) 01869 323 070 • [www.pridemobility.com](http://www.pridemobility.com)

## Revo® 3-wheel

## Revo® 4-wheel

Weight capacity:	21 Stone (136 kg)	21 Stone (136 kg)
Maximum speed <sup>1</sup> :	Up to 6 km/h (4 mph)	Up to 6 km/h (4 mph)
Ground clearance <sup>2</sup> :	5.7 cm (2.25")	5.7 cm (2.25")
Turning radius:	96.5 cm (38")	127 cm (50")
Overall length <sup>2</sup> :	109 cm (43")	114 cm (44.75")
Overall width <sup>2</sup> :	54.5 cm (21.5")	54.5 cm (21.5")
Wheels Front: Rear: Anti-tips:	5 cm x 20 cm (2" x 8") solid 7.5 cm x 23 cm (3" x 9") solid Rear	5 cm x 20 cm (2" x 8") solid 7.5 cm x 23 cm (3" x 9") solid Rear
Suspension:	N/A	N/A
Transport weight		
Total w/o batteries:	48 kg (106.5 lbs.)	57 kg (125 lbs.)
Heaviest piece when disassembled:	22 kg (48 lbs.) (rear section)	23 kg (51.5 lbs.) (front section)
Drive train:	Sealed transaxle, 24 volt DC motor	
Dual braking system:	Regenerative and electromechanical (electronic, regenerative disc brakes)	
Power elevating seat:	N/A	
Std. Seating:	Compact foldable molded plastic	
Battery charger:	O -board, 5 amp (standard)	
Per-charge range <sup>1</sup> :	Up to 26.5 km (16.5 miles)	
Battery requirements <sup>3</sup> :	(2) 12V deep cycle (AGM or gel cell type recommended)	
Battery size:	30 amp	
Warranty:	3-year limited warranty	

Colours:

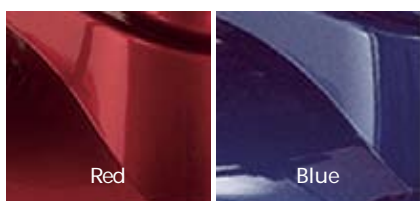

<sup>1</sup> Varies with user weight, terrain type, battery amp-hour (AH), battery charge, battery condition and tyre condition.

<sup>2</sup> Due to manufacturing tolerances and continual product improvement, this specification can be subject to a variance of (+ or - 3%).

<sup>3</sup> AGM or Gel-Cell type required.

<sup>4</sup> Battery weight may vary based on manufacturer.

*NOTE: All specifications subject to change without notice.*

## Features

- Exclusive black non-scuffing tyres
- Innovative interlocking drop-in battery packs for easy removal/installation
- Easily disassembles into 5 lightweight, easy-to-manage pieces
- 21 Stone (136 kg) weight capacity
- State-of-the-art, microprocessor-based motor controller
- Seat offers height adjustment, 360° rotation, and flip-up arm-rests for optimal user comfort
- Adjustable tiller for maximum comfort
- Headlight and taillight for added safety
- Easily accessible charger port and circuit breaker

## Options

- Forearm crutch holder
- Lap belt
- Cane/crutch holder
- Wishbone crutch holder
- Oxygen tank holder
- Cup holder
- Rear basket
- Safety flag
- Walker holder
- Weather cover
- Saddlebag
- Quad cane holder
- Cane, clip attachment



Revo® 3-wheel scooter



The information contained herein is correct at the time of publication; due to the manufacturers commitment to constant improvement and development, they reserve the right to alter specifications without prior notice. Theoretical range is calculated under test conditions in accordance with European standards. Actual range in normal use will depend on many factors, including the condition of the vehicle and its batteries, the weight of the driver, correct tyre pressure, ambient temperature, and the gradient and surface of the road or pavement.

32 Wedgwood Road, Bicester, Oxfordshire OX26 4UL  
(Tel) 01869 324 600 • (Fax) 01869 323 070 • [www.pridemobility.com](http://www.pridemobility.com)

**Pride**  
Mobility Products Ltd.